

# 21.5 inch FHD Borderless Monitor



## Display

Screen Size	21.5"
Active Display Area	478.656 (H) mm × 260.28 (V) mm
Resolution	1920 × 1080
Backlight	E-LED
Pixel Pitch	0.0831 (H) mm × 0.241 (V) mm
Brightness	250 cd/m <sup>2</sup>
Viewing Angle	178°/178°
Color Depth	8 bit
Contrast Ratio	3000 : 1
Response Time	6.5 ms (typ)
Refresh Rate	60 Hz
Haze	25 %
Reliability	7 × 16 H
Color Gamut	72%

## Interface

Video & Audio Input	HDMI 1.4 × 1, VGA × 1, Audio In × 1
---------------------	-------------------------------------

## Power

Power Supply	100-240 VAC, 50/60 Hz
Power Consumption	≤ 22 W
Standby Consumption	≤ 0.5 W

## Working Environment

Working Temperature	0°C to 40°C (32°F to 104°F)
Working Humidity	20% to 90% RH (Non-Condensing)
Storage Temperature	-20°C to 60°C (-4°F to 140°F)
Storage Humidity	10% to 90% RH (Non-Condensing)


## General

Casing Material	Plastic
VESA	75 mm × 75 mm, 4-M6 × 6 screw holes
Bezel Width	1.88 mm (top/left/right), 19 mm (bottom)
Product Dimensions (W × H × D)	With base: 492.356 (W) mm × 390.11 (H) mm × 200.20 (D) mm (19.38" × 15.36" × 7.88") Without base: 492.356 (W) mm × 289.680 (H) mm × 43.88 (D) mm (19.38" × 11.40" × 1.73")

# 8 MP Fixed Turret Network Camera

Package Dimensions (W × H × D)	647 (W) mm × 111 (H) mm × 406 (D) mm (25.49" × 4.37" × 15.99")
Net Weight	2.6 ± 0.5 kg (5.7 ± 1.1 lb.)
Gross Weight	4.0 ± 0.5 kg (8.8 ± 1.1 lb.)
Packing List	Monitor × 1, AC power cable × 1, base bracket × 1, user manual × 1, quick start guide × 1, HDMI cable × 1
Remarks	*The base is included by default. *The product appearance and parameters in this specification may vary from your actual device. Please consult our local sales staff for further information.

## Physical Interface

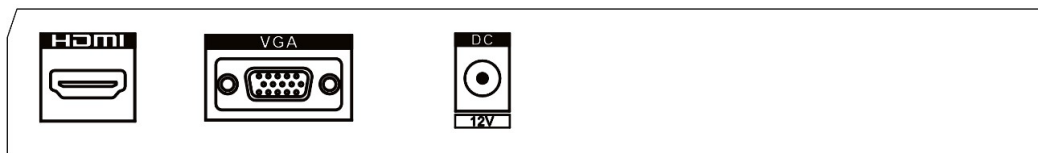

Interface	Description
HDMI	HDMI digital signal input
VGA	VGA analog signal input
AC 100-240V~	100-240 VAC power supply
AUDIO IN	3.5mm Audio Input